

Continuous water softening

with the Twin Tank Entipur® Monitor™ Valve

ENTIPUR®

Twin Tank Water Softener

ENTIPUR® water softeners deliver the benefits of 24 hour/day soft, clean water.

- Hair and skin will feel smoother and have more luster
- Dishes and glassware will rinse sparkling clean and clear
- Water lines and fixtures will not build up and restrict flow
- Stop the unsightly red rust stains of iron and the black staining of manganese

ENTIPUR® Monitor™

- Initiates regeneration on water consumption, or on the day and time of your choice

ENTIPUR® Twin Tank Softener

- Provides 24-hour supply of soft water, even while backwashing
- Backwash with filtered water, keeping the resin even cleaner
- Maximizes treated water capacity between regenerations

ENTIPUR® Monitor™ Valve



- Adjustable Service Reminder: Factory set to yearly and 80,000 gallons used
 - ◆ Green Light: Plugged in and working
 - ◆ Yellow Light Flashing: 80% of gallons used before audible service alarm
 - ◆ Red Light Flashing: 90% of gallons used
 - ◆ Red Light and Audible Service Alarm: 100% of gallons used (Alarm can be silenced for 2 days by pressing any button)

Information


- Press the Setup Button to display:
 - ◆ Installer name and phone number
 - ◆ Gallons remaining before regeneration
 - ◆ Days remaining before regen
- Time of Day
- Flow Rate
- Total Flow
- Peak Flow

Action

- Press the Regen Button to:
 - ◆ Regen tonight
- Press and hold the Regen Button to:
 - ◆ Regen now

Adjustment

- Press and hold the Setup Button to adjust:
 - ◆ Water hardness and the Entipur® Monitor™ automatically determines gallons between regeneration
 - ◆ Days between regen
 - ◆ Regen time
 - ◆ Audible alarm on/off

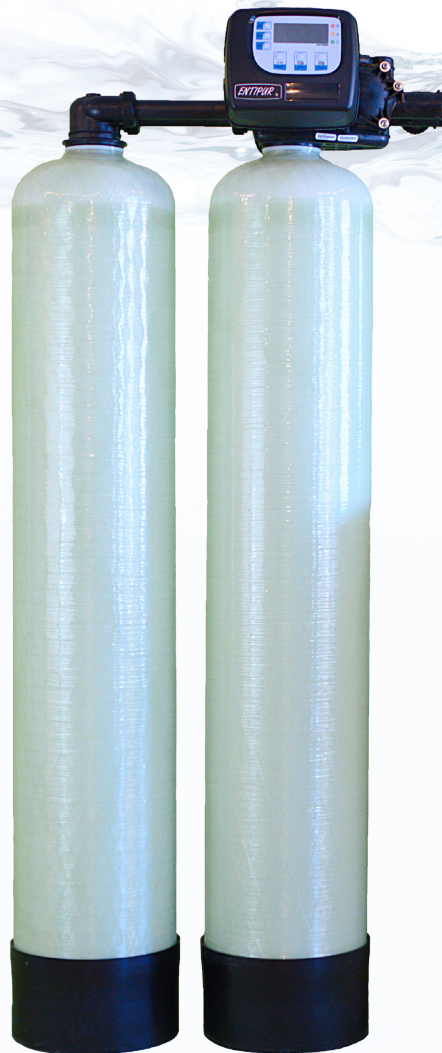

The BENEFITS

Benefits of Having Soft Water:

- Prevention of scale will result in longer lasting plumbing fixtures and appliances, including your water heater and dishwasher, lasting up to 1/3 longer
- Water heater efficiency will increase by up to 29%
- Cleaner, brighter and longer lasting clothes
- Cleaning products will lather better and last longer

Specifications

Model	Peak Flow	Overall Height	Tank Diameter	Tank Height
6T30-2TT*	7 gpm	55 in.	9 in.	48 in.
6T45-2TT*	9 gpm	61 in.	10 in.	54 in.
6T60-2TT*	14 gpm	59 in.	12 in.	52 in.
6T75-2TT*	14-18 gpm	61 in.	13 in.	54 in.

*Application engineering may be required

Removal Process:

- A soft sodium or potassium ion is used to remove hard water ions of calcium and magnesium scale, as well as the staining ions of iron and manganese.

Standard Equipment Includes:

- Entipur® Monitor™ Valve to regenerate on the day, time and gallons of your choice
- Bypass plumbing valve
- High Capacity Ion Exchange Resin Media
- 2 Fiberglass Mineral Tanks
- Full 1" Internal Piping
- 18"x33" Brine Tank
- Bypass connections sold separately

Your Local Water Treatment Dealer:



R.E. Prescott Co., Inc.
10 Railroad Avenue
Exeter, NH 03833
603-772-4321
www.represcott.com
info@represcott.com